

Modelling Of Statcom Utilising Cascaded 13 Level H Bridge.



Engineering

KEYWORDS : Cascaded multilevel inverter (H-bridge), Static synchronous compensator, ABC coordinates

RAKESHKUMAR B. SHAH

Lecturer, Electrical Engineering Department, R. C. Technical Institute, Sola, Ahmedabad. (GUJARAT)

ABSTRACT

This paper is dedicated to a comprehensive study of static synchronous compensator (STATCOM) systems utilizing cascaded-multilevel inverters. Among flexible AC transmission system (FACTS) controllers, the STATCOM have shown feasibility in terms of cost effectiveness in a wide range of problem-solving abilities from transmission to distribution levels. A cascade multilevel inverter is a power electronic device built to synthesize a desired AC voltage from several levels of DC voltages. A method is presented showing that a cascade multilevel inverter can be implemented using only a single DC power source and capacitors. The simulation result of MATLAB/Simulink software indicates the superior performance of the proposed control system, as well as the precision of the proposed models.

1. INTRODUCTION

The concept of multilevel inverters has been introduced since 1975. The term multilevel began with the three level inverters. Subsequently, several multilevel inverter topologies have been developed. However, the elementary concept of a multilevel inverter to achieve higher power is to use a series of power semiconductor switches with several lower voltages dc sources to perform the power conversion by synthesizing a staircase voltage waveform. Capacitors, batteries and renewable energy voltage sources can be used as the multiple dc sources in order to achieve high voltage at the output; however, the rated voltage of the power semiconductor switches depends only upon the rating of the dc voltage sources to which they are connected.

A cascade multilevel inverter is a power electronic device built to synthesize a desired AC voltage from several levels of DC voltages. A cascade multilevel inverter can be implemented using only a single DC power source and capacitors. To operate a cascade multilevel inverter using a single DC source, it is proposed to use capacitors as the DC sources. A standard cascade multilevel inverter requires 's' DC sources for 2s+1 level. To be able to operate in a high-voltage application, a large number of DC capacitors are utilized in a cascaded multilevel inverter-based STATCOM. To obtain a low distortion output voltage or a nearly sinusoidal output waveform, a triggering signal should be generated to control the switching frequency of each power semiconductor switch.

2. OBJECTIVE

The objective is to come out with a simulation model of STATCOM based cascaded thirteen level inverter and analyzes its operation.

3. COMPARATIVE ANALYSIS OF CASCADED MULTILEVEL INVERTERS

By increasing the number of levels in the inverter, the output voltages have more steps generating a staircase waveform, which has a reduced harmonic distortion. However, a high number of levels increases the control complexity and introduces voltage imbalance problems. For example, 11-level cascaded H-bridge inverters will have 5 SDCSs and 5 full bridges. Similarly, 13-level cascaded H-bridge inverters will have 6 SDCSs and 6 full bridges. The most attractive features of Cascaded Multilevel Inverters are as follows:

- They can generate output voltages with extremely low distortion and lower dv/dt.
- They draw input current with very low distortion.

4. SIMULATION CIRCUIT

It is well known that the amount and type (capacitive or inductive) of reactive power exchange between the STATCOM and the system can be adjusted by controlling the magnitude of STATCOM output voltage with respect to that of system voltage. Figure 1 shows simulated circuit of STATCOM with 13-level cascaded multilevel inverter

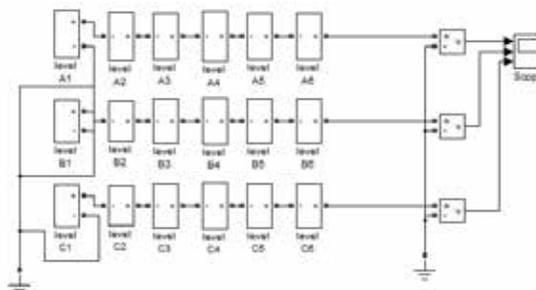


Figure 1 Simulated circuit of the STATCOM with 13-level cascaded multilevel inverter

The phase output voltage is synthesized by the sum of individual inverter outputs,

$$i.e. V_{ca} = V_{ca1} + V_{ca2} + V_{ca3} + \dots + V_{can}$$

Therefore, the phase voltage for 13-level cascaded inverter is,

$$V_{ca} = V_{ca1} + V_{ca2} + V_{ca3} + V_{ca4} + V_{ca5} + V_{ca6}$$

5. Control of DC Capacitor Voltage

If all the components were ideal and the STATCOM output voltage were exactly in phase with the system voltage, there would have been no real power exchange between STATCOM and system therefore the voltages across the DC capacitors would have been able to sustain.

However, a slight phase difference between the system voltage and the STATCOM output voltage is always needed to supply a small amount of real power to the STATCOM to compensate the component loss so that the DC capacitor voltages can be maintained. This slight phase difference is achieved by adjusting the phase angle of the sinusoidal modulating signal. If the real power delivered to the STATCOM is more than its total component loss, the DC capacitor voltage will rise, and vice-versa. This real power exchange between STATCOM and the system is described by Equation (2) below,

$$P = \frac{V_s V_{STATCOM}}{X} \sin(\delta) \dots \dots \dots (2)$$

Where, $\delta\delta$ is the phase angle difference between STATCOM voltage and the system voltage.

6. SIMULATION RESULT

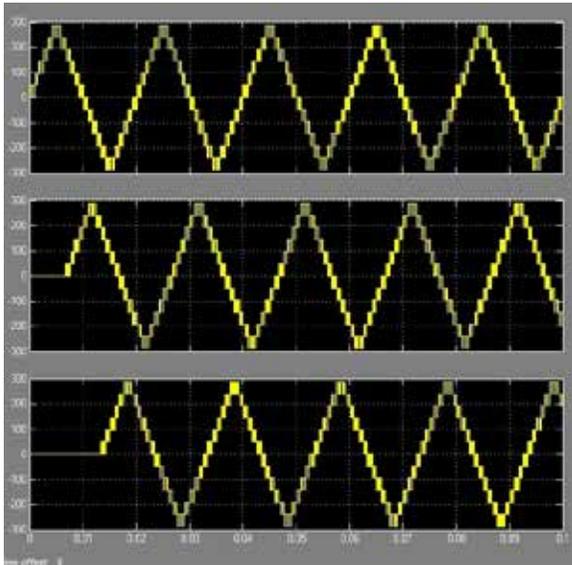


Figure 2 Approximately Sinusoidal thirteen level inverter output phase voltages

Figure 2 shows the cascaded thirteen level inverter output phase voltage waveform. It can be seen that the sinusoidal waveform and the thirteen level cascaded inverter output waveform both are approximately same. But the square wave output has a high harmonic content, not suitable for certain AC loads such as motors or transformers.

7. CONCLUSION

To achieve as stable a system as possible, a well-defined model and an effective DC-link-balancing method are necessary. The cascaded seven-level, nine-level, eleven-level inverters have been used as the studied system. And, the cascaded thirteen level inverter based STATCOM is designed according to the simplified model in abc coordinates. The simulation results show superior performances of the designed abc coordinates inverter based STATCOM. The STATCOM has the great advantage of a fewer number of devices. The VSI is extremely fast in response to reactive power change. The simulation of the STATCOM is performed in the Simulink environment and the results are presented.

REFERENCE

- [1] John N. Chiasson, Leon M. Tolbert, Keith J. McKenzie and Zhong Du, "Control of a Multilevel Converter Using Resultant Theory", IEEE Transaction On Control System Technology, Vol.11, No.3, May 2003.
- [2] Jih-Sheng Lai and Fang Zheng Peng, Member IEEE, "Multilevel Converters-A New Breed of Power Converters", IEEE Transaction On Industry Applications, Vol. 32, No. 3, May/June 1996.
- [3] Jingsheng Liao, Keith Corzine and Mehdi Ferdowsi Member IEEE, "A New Control Method for Single DC Source Cascaded H-Bridge Multilevel Converters Using Phase-Shift Modulation", IEEE 2008.
- [4] Bin Zhang, Alex Q. Huang, Yunfeng Liu and Stanley Atcity, "Performance of the New Generation Emitter Turn-Off (ETO) Thyristor", IEEE 2002.
- [5] Chang Qian, Marisa L. Crow, "A Cascaded Converter-Based Statcom with Energy Storage", IEEE 2002.
- [6] Dr. Jagdish Kumar, "Direct Voltage Control in Distribution System using CMLI based STATCOM", International Journal of Electronics Communications and Electrical Engineering", Vol.2, Issue 10, Oct. 2012.
- [7] Wanki Min, Joonki Min and Jaeho Choi, "Control of STATCOM using Cascade Multilevel Inverter for High Power Application", IEEE International Conference on Power Electronics and Drive Systems, Hong Kong, July 1999.
- [8] Jose Rodriguez, Jih-Sheng Lai and Fang Zheng Peng, "Multilevel Inverters: A Survey of Topologies, Controls, and Applications", IEEE Transactions On Industrial Electronics, Vol. 49, No. 4, August 2002.
- [9] Laszlo Gyugyi, "Application Characteristics of Converter-Based FACTS Controllers", IEEE Siemens Power Transmission & Distribution, 2000.
- [10] F. Z. Peng, J.W. McKeever and D.J. Adams, "Cascade Multilevel Inverters for Utility Applications", IEEE Transactions On Power Electronics, Vol. 17, No. 6, February 2003.
- [11] Leon M. Tolbert, Fang Zheng Peng and Thomas G. Habetler, "Multilevel Converters for Large Electric Drives", IEEE Transactions On Industry Applications, Vol. 35, No. 1, January/February 1999.
- [12] Phee Kuan Jin, Mohamed S.A. Dahidah and Christian Klumpner, "Nine-Level SHE-PWM VSC Based STATCOM for VAR Compensation", IEEE International Conference On Power and Energy, 29 Nov.-1 Dec. 2010.
- [13] Geza Joos, Xiaogang Huang and Boon-Teck Ooi, "Direct-Coupled Multilevel Cascaded Series Var Compensators", IEEE Transactions On Industry Applications, Vol. 34, No. 5, September 1998.
- [14] Manoj Yadav, Harish Kumar, Perminder Balyan, "Cascaded Multilevel Inverter based On STATCOM", International Journal of Advanced Technology in Engineering and Science, Volume No. 02, Issue No. 08, August 2014.
- [15] Soumya K., "Performance Evaluation of Adjustable Speed Drives using Multilevel Inverter based STATCOM", International Journal of Engineering Research and Applications, Vol. 3, Issue 01, 2013.
- [16] G. Sundar, S. Ramareddy, Research Scholar, "Digital Simulation of Multilevel Inverter Based STATCOM", Journal of Theoretical and Applied Information Technology, 2009.
- [17] Muhammad H. Rashid, "Power Electronics Circuits, Devices, and Applications (Second Edition)".
- [18] S. A. Bashi, N.F. Mailah, M.Z. Kadir and K.H. Leong, "Generation of Triggering Signals for Multilevel Converter", Euro Journals Publishing, Inc. 2008.
- [19] Siriroj Sirisukprasert, Zhenxue Xu, Bin Zhang, Jason Lai, and Alex Q. Huang, "A High-Frequency 1.5 MVA H-Bridge Building Block for Cascaded Multilevel Converters using Emitter Turn-Off Thyristor" IEEE 2002.
- [20] Wenchao Song and Alex Q. Huang, "Control Strategy for fault-Tolerant Cascaded Multilevel Converter based STATCOM", Semiconductor Power Electronics Center, IEEE 2007.