



Acoustic Parameters of Green - Non Green Chemicals at Variable Frequencies

J K Pendharkar

K J Somaiya College of Science and Commerce

Veena Khilnani

K J Somaiya College of Science and Commerce

ABSTRACT

Acoustic parameters of chemicals and the relationship among these parameters is the recent, innovative and informative area in interdisciplinary fields of Physics and Chemistry. In this research various parameters like adiabatic compressibility, acoustic impedance, Wada constant, Rao constant and their relations are observed at variable frequencies. Thus comparison is made between Green and non Green chemicals on these parameters at different frequencies. The said parameters are measured using Ultrasonic interferometer working at 1 MHz and 3 MHz.

KEYWORDS : green and Non green solvents, Ultrasonic interference, Acoustic parameters

Introduction:


Acoustic study is found to be very effective as it helps in measuring many Thermodynamic parameters of chemicals. It is also found to be Non destructive technique that is without disturbing or wasting chemicals we can study properties of chemicals. The amount of chemical required is just less than 10cc. Using Ultrasonic Interferometer one can determine wavelength of sound in the chemical under study, and since frequency is known velocity at room temperature can be determined. By knowing velocity, density, Molecular weight etc one can determine parameters like Adiabatic compressibility, Acoustic impedance, Wad constant, Rao constant. Further relations are observed between these parameters. This study is extended for different frequencies and change if any is measured due to change in frequency of sound.

Objectives:

- 1) To measure the thermo acoustic parameters of Green and non Green chemicals using an ultrasonic interferometer (at 1 MHz and 3 MHz).
- 2) To get a relation between these parameters.
- 3) To compare the Green chemicals and non Green chemicals in terms of these parameters at different frequencies.

Methodology:

The solvent under study is poured in the narrow cylinder and is fitted with acoustic reflector. Ultrasonic waves with constant frequency 1 MHz and then 3 MHz are then allowed to pass through, which are reflected back to source forming standing wave pattern. This instrument is connected to supporting sensor device which shows maxima and minima of current, when we moved reflector. These maxima and minima were corresponding to nodes and antinodes formed within the cylinder. By knowing distance between two consecutive maxima one can find the value of half wavelength. By knowing wavelength one can find velocity of ultrasonic sound in that liquid. By knowing density, velocity, and atomic weight, etc one can find various acoustic parameters. The details of apparatus and procedure of measuring wavelength of sound is explained in short note along with schematic diagram of apparatus used for measurement of sound velocity in chemicals. Note that because high accuracy in the measurement of wavelength and precise value of frequency the related values of parameters are determined with good accuracy.



Note: An ultrasonic interferometer is a simple and direct device to determine the ultrasonic velocity in liquids with a high degree of accuracy.

The principle used in the measurement of velocity (v) is based on the accurate determination of the wavelength (λ) in the medium.

Ultrasonic waves of known frequency (f) are produced by a quartz plate fixed at the bottom of the cell. The waves are reflected by a movable metallic plate kept parallel to the quartz

plate. If the separation between these plates is exactly a whole multiple of the sound wavelength, standing waves are formed in the medium. The acoustic resonance gives rise to an electrical reaction on the generator driving the quartz plate and the anode current of the generator becomes maximum. If the distance is now increased or decreased and the variation is exactly one half wavelength ($\lambda/2$) or multiple of it, anode current again becomes maximum.

Theory: Following properties are observed for the polar and non polar chemicals using Ultrasonic Interferometer along with the given terminology:

- 1) Adiabatic compressibility $\beta = 1/v^2 \cdot d$ where, v = velocity & d = density

The adiabatic compressibility is the fractional decrease of volume per unit increase of pressure, when no heat flows in or out. If there is no heat flow, the entropy is unchanged, in a reversible process, so that an adiabatic process is one at constant entropy. The compressibility factor is a measure intermolecular attraction.

- 2) Specific acoustic impedance $Z = v \cdot d$

Specific acoustic impedance is a characteristics property of a medium. The acoustic impedance is analogous to the refractive index of medium.

- 3) Rao's constant $R = [Mw/d] \times v^{1/3}$ where v is the velocity

Rao established the empirical relationship between molecular weight, density and velocity. The quantity R is also called as Molar sound velocity.

- 4) Wada constant $W = [Mw/d] \times \beta^{-1/7}$

The molar compressibility is a more direct structural property of a liquid than molar sound velocity. So Wada suggested parameter Wada constant W which is also called as molar compressibility and suggest the strength of molecular interaction in liquids. The behavior Wada constant is analogous to R .


Note:

- 1) The degree of compressibility of a fluid has strong implications for its dynamics. Most notably, the propagation of sound is dependent on the compressibility of the medium.
- 2) Molecular interactions can be studied through Rao's constants and Wada's constants which are constants in non-interacting substances.
- 3) Acoustic impedance indicates how much sound pressure is generated by the vibration of molecules of a particular acoustic medium at a given frequency. The acoustic impedance Z (or sound impedance) is frequency (f) dependent.

Observations:


Acoustic parameters for Green chemicals at 1 MHz frequency:

Chemicals	$\beta_{ad} \times 10^{-10}$	$Z \times 10^6$	W	R
Water	4.38	1.51	0.39	0.2
Acetonitrile	7.16	1.04	1.05	0.57
Ethanol	9.87	0.89	1.13	0.61
2 propanol	10.22	0.877	1.47	0.79
Toluene	6.81	1.13	2.16	1.16

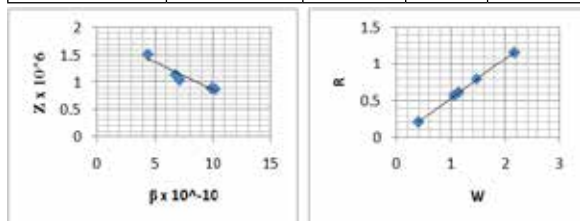


Acoustic paramters for Green chemicals at 3 M Hz frequency:

Chemicals	$\beta_{ad} \times 10^{-10}$	$Z \times 10^6$	W	R
Water	4.38	1.51	0.39	0.21
Acetonitrile	7.13	1.05	1.06	0.57
Ethanol	9.42	0.915	1.14	0.61
2 propanol	10.44	0.86	1.46	0.79
Toluene	6.24	1.18	2.19	1.18

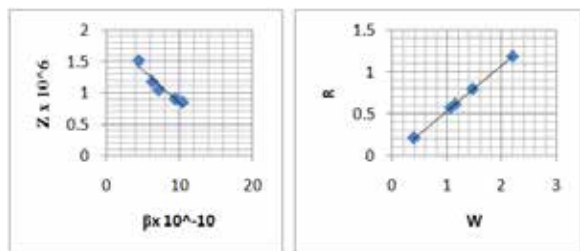


Acoustic parameters of Non Green chemicals at 1 M Hz frequency:

Chemicals	$\beta_{ad} \times 10^{-10}$	$Z \times 10^6$	W	R
DMSO	4.16	1.62	1.56	0.81
THF	7.14	1.11	1.65	0.87
Dioxane	5.31	1.39	1.8	0.94
Hexane	14.27	0.68	2.40	1.32
CCl4	7.37	1.47	1.95	0.94
DMF	5.18	1.35	1.63	0.87
DCE	5.90	1.45	1.65	0.83

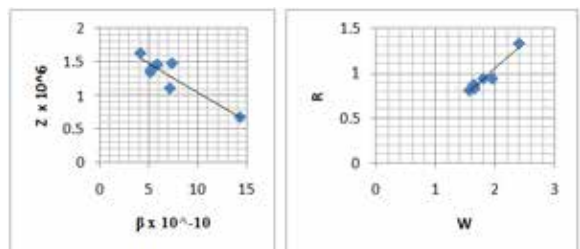

Acoustic parameters for Non Green Chemicals at 3 M Hz frequency:

Chemicals	$\beta_{ad} \times 10^{-10}$	$Z \times 10^6$	W	R
DMSO	4.05	1.65	1.56	0.81
THF	6.92	1.13	1.65	0.88
Dioxane	5.36	1.38	1.80	0.94
Hexane	12.79	0.72	2.44	1.34
CCl4	7.26	1.48	1.95	0.94
DMF	4.67	1.42	1.66	0.88
DCE	6.12	1.43	1.64	0.83

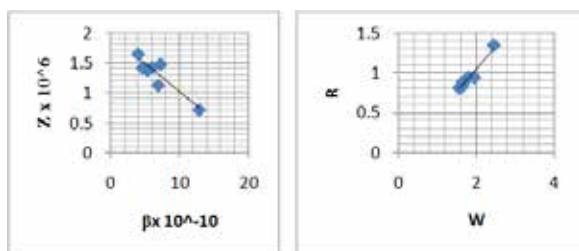

Analysis:

The graph of adiabatic compressibility is plotted against Acoustic impedance, and the graph of Wada constant is plotted against Rao constant. It was observed that as adiabatic compressibility decreases the acoustic impedance decreases for Green as well as non Green chemicals, and as Wada constant increases Rao constant also increases for both types of chemicals. This observation is consistent with theory explained.

Result:

- 1) Adiabatic compressibility and acoustic impedance is inversely proportional, while Wad constant and Rao constant is directly proportional to each other for all frequencies.
- 2) The variations of these parameters are similar for both Green as well as non Green chemicals and found to be frequency independent.
- 3) However the relative values of adiabatic compressibility etc are found to be more for non Green chemicals than Green chemicals.

REFERENCES

1) Adiabatic compressibility and acoustic impedance is inversely proportional, while Wad constant and Rao constant is directly proportional to each other for all frequencies. | 2) The variations of these parameters are similar for both Green as well as non Green chemicals and found to be frequency independent. | 3) However the relative values of adiabatic compressibility etc are found to be more for non Green chemicals than Green chemicals. | References: | 1) A. Varada Rajulu and P. Mabu Sab, Bull. Mater. Sci., Vol. 18 (June 1995), No. 3, pp. 247-253. | 2) R. Paladhi and R.P. Singh, Acustica, Vol. 72, (1990), pp. 90-95. | 3) R.P. Singh, G.V. Reddy, S. Majumdar and Y.P. Singh, J. Pure Appl. Ultrason, | Vol. 5(1983), pp. 52-54. | 4) Acoustic Parameters of Green Chemicals | International refereed journal 'Indian Streams Reserach Journal', Vol II, Issue IX/Oct 2012, ISSN No: 2231-5063. J K Pendharkar, Veena Khilnani, M N Nyayate.