Volume : 4 | Issue : 10 | Special Issue Oct- 2015 • ISSN No 2277 - 8179

OPTIMIZING THE STRENGTH OF SPUR GEAR USING TAGUCHI'S APPROACH

Engineering

KEYWORDS: module, arrays, optimization, regression.

Amandeep Singh Wadhwa

Faculty, Mechanical Department,University Institute of Engineering & Technology, Panjab University, Chandigarh, India.

ABSTRACT

In this paper, strength of the spur gear was studied under the influence of module, number of teeth and speed . The optimum result was achieved in the experimental study by employing Design of Experiment with full factorial design. The ANOVA analysis was used to obtain optimum parameters and optimum parameters are module 12mm,no. of teeth 20 and speed 900 rpm to achieve maximum strength. Also the relation between the parameters and the performance measure were determined using multi regression equation.

I. INTRODUCTION

Gears are used to transmit power from one shaft to another with zero slip. Gears are classified according to the position of axis of shaft, type of gearing and the peripheral speed of the gears.

(1)According to axis of shaft: Spur and helical gears are used to transmit power when axis of shaft are parallel. The spur gear have straight teeth whereas helical gears have curved teeth. Bevel gears transmit power when shafts are inclined at an angle ranging from 0° to 180°.When angle between shafts is 90° and velocity ratio is unity it is called mitre. Worm gears transmit power between two non coplanar shafts.

(2)According to type of gearing :External gears mesh externally and rotate in opposite directions whereas internal gears mesh internally and rotate in same direction.

(3)According to peripheral speed: The gears having speed less than 3 m/s are low speed gears and above 15m/s are called high speed gears. The gears having speed range between 3 to 15 m/s are called moderate speed gears.

The objective of the gear drive is to transmit high power with higher load-carrying and lower weight. But the gear load capacity may be limited by tooth strength. With the development of gear heat treatment technology, such as carburizing, high-frequency hardening and nitriding technology, the tooth contact strength has been significantly improved. Researchers in the gear field have proposed many solutions to tackle the problem of failure.

The strength of spur gear tooth is determined from Lewis equation which is given as:$W_s=\sigma_o C_v \pi b m$where σ_o=static strength of teeth ,C_v=velocity factor, b=face width, m=module and y=tooth form factor.

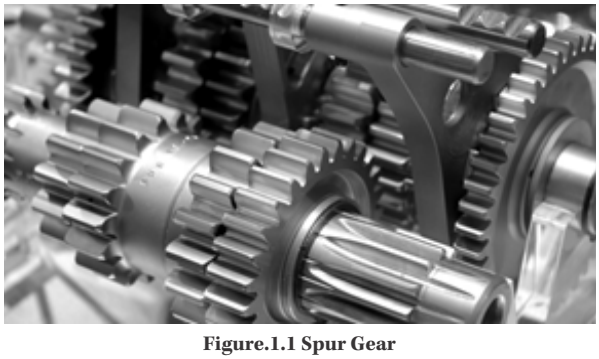

Figure.1.1 Spur Gear

II. METHODOLOGY

Design of experiments (DOE) method are among the most effective and useful statistical quality control technique to investigate the individual and interaction effects of the process parameters. DOE methods can be an important part of system optimization, yielding definitive system design or redesign recommendations. These methods also involve the activity experimental planning, conducting experiments, and fitting models to the outputs. An essential ingredient in applying DOE methods is the use of experimental design can have a large influence on the accuracy and the construction cost of the approximations. Several experimental design techniques have been used to aid in the selection of appropriate points.Experimental design strategy, using Taguchi orthogonal arrays concept is used in the paper.

The following L-9 orthogonal array was applied:

Table 1.1 L-9 Orthogonal array with actual values

Module (mm)	No. of Teeth	Speed (rpm)	Strength
8	20	900	31366.52
8	24	1100	24583.70
8	28	1300	19656.34
10	20	1100	34972.07
10	24	1300	27926.63
10	28	900	34775.09
12	20	1300	37814.12
12	24	900	46924.84
12	28	1100	36282.89

III. RESULTS & DISCUSSION

Observations in Taguchi Analysis: Strength versus Module (mm), No. of Teeth, Speed (rpm)

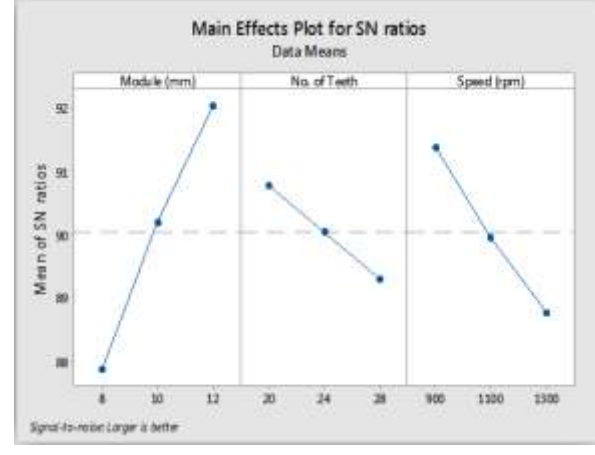

Figure 1.2 Main effects plot for S/N Ratio (MRR)

The above SN ratio graph was made using 3 variables i.e. module, number of teeth and speed. As observed from graph, it is clear that at 12 mm of module, 20 number of teeth and 1300 rpm speed gives the

best output in terms of strength of gear teeth will be maximum.
ANOVA Test results for strength of gear

Table 1.2 General linear Model (ANOVA) for strength of gear

Source	DF	Seq SS	Adj SS	Adj MS	F	P	Contribution %
Module (mm)	2	26.4215	26.4215	13.2107	6137.02	0.000	66
No. of Teeth	2	3.3266	3.3266	1.6633	772.68	0.001	8.3
Speed (rpm)	2	10.2747	10.2747	5.1373	2386.54	0.000	25.6
Residual Error	2	0.0043	0.0043	0.0022			
Total	8	40.0270					

CONTOUR PLOTS OF STRENGTH

A contour plot is a graphical technique for representing a 3-dimensional surface by plotting constant z slices, called contours, on a 2-dimensional format. That is, given a value for z, lines are drawn for connecting the (x,y) coordinates where that z value occurs.

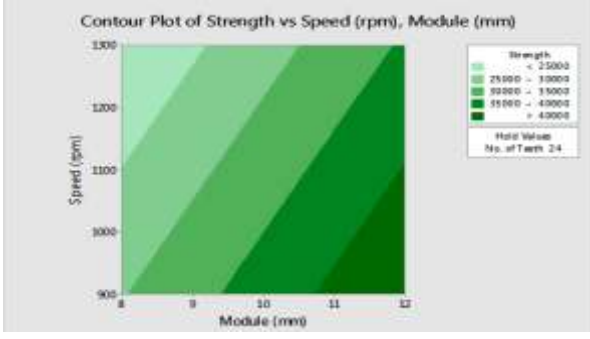

Figure 1.3

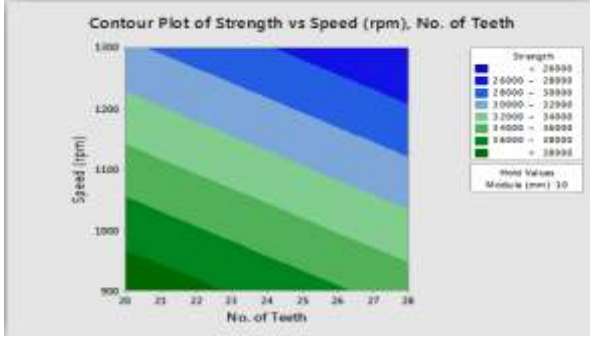

Figure 1.4

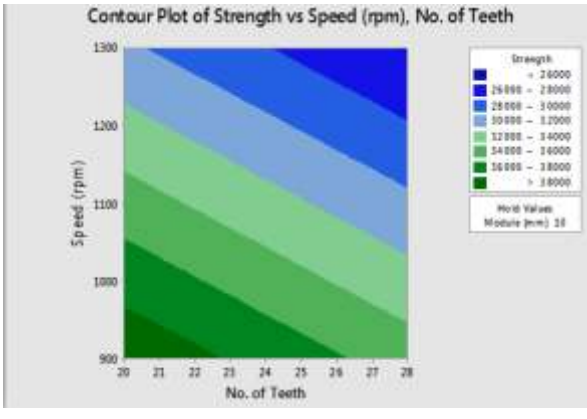

Figure 1.5

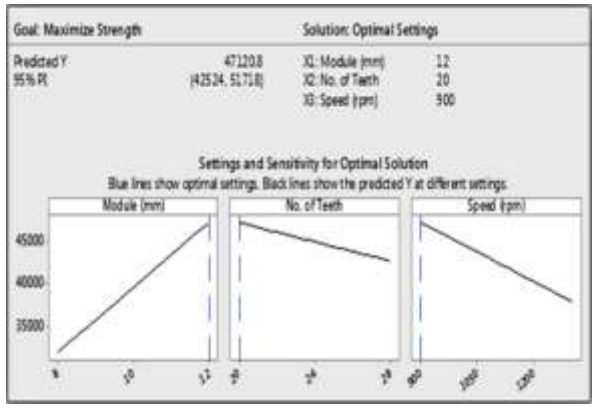

Figure 1.6 Multiple Regression for Strength Optimization

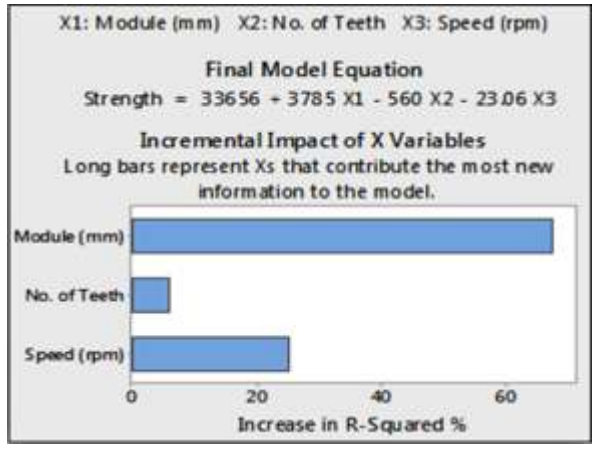

Figure 1.7 Multiple Regression for Strength building report

III CONCLUSION

The optimized value of strength of gear teeth comes out to be at 12 mm module,20 number of teeth and speed of 900 rpm as shown in Fig1.6 and the optimized value is 47120.8N at 95% confidence level. Further from Table 1.2 it is evident that maximum contribution towards achieving the optimized output is of module which is 66%..The contribution of speed (N) and number of teeth is 25.6 percent and 8.3 percent respectively. Further Figure 1.7 shows the multiple regression equation developed by the Taguchi software for optimizing the strength of spur gear. The application of Taguchi L9 array provides the optimized result with 95 percent confidence level and by using only 9 input values rather than conducting 27 experiments. Hence this technique of optimizing is accurate,fast and reliable and can be carried out conveniently with less effort and resources.

IV FUTURE SCOPE

The study presented in the paper is limited to spur gears with module,number of teeth and speed as design inputs. It can be extended to include face width as design variable. Further Taguchi technique can be used to optimize heat generation and dissipation in worm gears. The present study can be extended to improve the strength of helical and bevel gears. For helical gears helix angle can be taken as one of design input and for bevel gears angle between the shafts can be included as the design input variable.

REFERENCE

[1] Taguchi's quality engineering handbook by Dr. Genichi Taguchi, Dr. SubirChowdhury, Yuin Wu, John Wiley & Sons (19 November 2004), ISBN: 978-0471413349 | [2] P.Marimuthu and G. Muthuveerappan, 'Optimum Profile Shift Estimation on Direct Design Asymmetric Normal and High Contact Ratio Spur Gears Based on Load Sharing', 1st International Conference on Structural Integrity, ICONS-2014. | [3] ConstantinOprana, MirceaPricopb, ConstantinTeodorub,' Researches on Design and Manufacturing of Innovative Double Gears Pumps', 25th DAAAM International Symposium on Intelligent Manufacturing and Automation, DAAAM 2014. | [4] J.I. Pedrero, M. Pleguezuelos,M.B. Sánchez, 'Study of the influence of the design parameters on the efficiency of spur gears', International Gear Conference 2014: 26th–28th August 2014, Lyon 2014, Pages 774–783. | [5] Liu Hailiang, Wang Lixin, 'Assessment of Landing Gear Design based on the Virtual Testing and Evaluation Methodology', "APISAT2014", 2014 Asia-Pacific International Symposium on Aerospace Technology,APISAT2014. | [6] A Textbook of Machine Design by PC Sharma and DK Aggarwal, S.K. Kataria& Sons; Reprint 2013 edition (2013), ISBN: 978-9350142813