


Comparative Analysis of Hybrid Transform Domain Image Steganography Embedding Techniques



Science

KEYWORDS : Image Steganography; Discrete Cosine Transform (DCT); Discrete Wavelet Transform (DWT); Least Significant Bit (LSB)

Mukta Goel

Assistant Professor, The Technological Institute of Textile and Sciences, Bhiwani, Haryana - 127021

Rohit Goel

Assistant Professor, The Technological Institute of Textile and Sciences, Bhiwani, Haryana - 127021

ABSTRACT

Steganography is an important area of research in recent years involving a number of applications. Image steganography is the art of hiding secret information into a cover image. The modern secure image steganography presents a challenging task of transferring the embedded information to the destination without being detected. Transform domain methods hide messages in insensitive areas of the cover image which makes them more robust to attacks. DCT/DWT is used to transform cover image from spatial domain to frequency domain. The secret image or information is then embedded into the frequency domain coefficients. This paper compares hybrid transform domain technique for different methods for embedding secret image into cover image. The algorithms are compared for Peak Signal to Noise Ratio (PSNR) which is a measure of the difference between the cover image and the stego image.

I. Introduction

Hiding secret data is of prime importance for security purposes. Multimedia is the key for achieving this, so, any of the media such as text, audio, video and image can be used to hide data for security. The formats that are more suitable are those with a high degree of redundancy. Image is a good cover medium for concealing secret data as it contains more redundant information. Image hiding, by Steganography, protects the data from illegal access by hiding the data into a cover image such that an unintended observer is not aware of the existence of the hidden data [1]. Steganography basically consists of three things: cover object (used to hide secret message), secret message to be embed, and stego object (cover object after hiding the secret data) [2]. As human eyes are not sensitive for identifying little changes in an image, this fact can be used for hiding data in an image.

The paper is organized as follows: Section 2 is devoted to transform domain techniques for image steganography. Section 3 gives a brief introduction of the hybrid transform domain technique. Section 4 describes the various embedding methods of hiding secret image into hybrid transform domain cover image. Section 5 compares and concludes various methods of image steganography discussed in section 4 and gives the scope for future work.

II Transform Domain Techniques

New algorithms keep emerging prompted by the performance of spatial domain techniques due to rapid development of information technology and by the need for enhanced security system. As seen in the spatial domain techniques, LSB modification of images is an easy technique to embed information, but these are highly vulnerable to even small cover modifications [3]. An attacker can simply apply signal processing techniques in order to destroy the secret information entirely [4].

Most robust steganography systems known today actually operate in some sort of transform domain. Transform domain methods hide messages in insignificant areas of the cover image which makes them more robust to attacks. Many transform domain variations exist. One method is to use the Discrete Cosine Transformation (DCT) as a technique to embed information in images; another would be the use of wavelet transforms. Transformations can be applied over the entire image, to blocks throughout the image, or there may be other variations. However, a trade-off exists between the amount of information added to the image and the robustness obtained.

Discrete Cosine Transform (DCT)

The two dimensional DCT is the heart of the most popular lossy digital image compression systems today. This method encodes the secret information in the frequency domain by modulating the relative size of two or more DCT coefficients in an image.

It is an orthogonal transform, which has a fixed set of (image independent) basis functions, an efficient algorithm for computation, and good energy compaction and with correlation reduction properties.

The 1D DCT of a $1*N$ vector $s(j)$ is defined as:

$$S(k) = DCT(s) = \frac{C(k)}{2} \sum_{j=0}^{N-1} s(j) \cos\left(\frac{(2j+1)k\pi}{2N}\right) \quad (1)$$

$$C(k) = \begin{cases} \sqrt{\frac{1}{N}} & \text{for } n = 0 \\ \sqrt{\frac{2}{N}} & \text{otherwise} \end{cases} \quad (2)$$

$$s(k) = DCT^{-1}(S) = \sum_{j=0}^{N-1} \frac{C(j)}{2} s(j) \cos\left(\frac{(2j+1)k\pi}{2N}\right) \quad (3)$$

The DCT can be extended to the transformation of 2D signals or images [5]. This can be achieved in two steps: by computing the 1D DCT of each of the individual rows of the two dimensional image and then computing the 1D DCT of each column of the image. In digital image processing, the two dimensional version of DCT is used which is given as:

$$S(u, v) = \frac{2}{N} C(u)C(v) \sum_{x=0}^{N-1} \sum_{y=0}^{N-1} s(x, y) \cos\left(\frac{\pi u(2x+1)}{2N}\right) \cos\left(\frac{\pi v(2y+1)}{2N}\right) \quad (4)$$

$$s(x, y) = \frac{2}{N} \sum_{u=0}^{N-1} \sum_{v=0}^{N-1} C(u)C(v) s(u, v) \cos\left(\frac{\pi u(2x+1)}{2N}\right) \cos\left(\frac{\pi v(2y+1)}{2N}\right) \quad (5)$$

Discrete Wavelet Transform (DWT)

A wavelet is simply a small wave which has its energy concentrated in time to give a tool for the analysis of transient, non-stationary or time varying phenomena. A signal can be better analyzed if expressed as a linear decomposition of sums of products of coefficients and functions. These set of coefficients are called the Discrete Wavelet Transform (DWT) of a signal [6]. DWT has spatial frequency locality, which means that if signal is embedded, it will affect the image locally. Also, they do not take into account the fact that different regions in an image may have different frequency characteristics.

The forward 2-D DWT can be implemented using a set of up-samplers, down-samplers, and recursive two-channel digital filter banks. There are many available filters, but the most commonly used are Haar Wavelet filters, and Daubechies filters. Each of these filters decomposes the image into several frequencies. Important properties of wavelet filters in digital image compression are symmetry (used for avoiding artifacts at the borders), orthogonality (fat algorithm), regularity, and degree of smoothness.

When applying DWT on an image, four different sub-bands are

obtained, which are LL, LH, HL, and HH as shown in figure 1.

1. LL: A coarser approximation to the original image containing the overall information about the whole image. Since human eyes are much sensitive to the low frequency part, this is the most important component in the reconstruction process.
2. HL and LH: They are obtained by applying the high pass filter on one coordinate and the low pass filter on the other coordinate.
3. HH: It shows the high frequency component of the image in the diagonal direction.

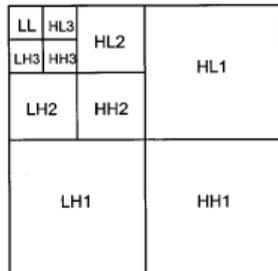


Fig. 1: Spectral Decomposition of a Cover Image in 2-D Plane

For 2-D images, applying DWT separates the image into a lower resolution approximation image or band (LL), as well as horizontal (HL), vertical (LH), and diagonal (HH) detail components.

With the DWT, the significant part of the spatial domain image exist in the approximation band that consists of low frequency wavelet coefficients and the edge and texture details usually exist in high frequency wavelet coefficients bands such as HH, HL, and LH. The human eyes are not sensitive to small changes in the edges and textures of an image but to the small changes in the smooth parts [7].

III Hybrid Transform Domain Technique

DCT and DWT are the most commonly used algorithms. The DCT has high energy compaction property and requires less computational resources [8]. The energy compaction property of an algorithm refers to the ability to concentrate most important information signal into as much as few low frequency components. On the other hand, DWT is a multi-resolution transform technique and variable compression can be easily achieved. The main disadvantages of DCT are introduction of false contouring effects and blocking artifacts at higher compression, and, that of DWT is requirement of large computational resources. So the idea of exploring the advantages of both algorithms generates the idea of combining the two techniques. Such combination of two algorithms is referred as hybrid algorithm.

Both DCT and DWT transform domain techniques are robust in nature and one technique outweighs another with respect to some parameter of importance. So, instead of using only one technique hybrid transform domain technique can be used [9] [10]. This allows for better imperceptibility and payload in comparison to using a single technique. The block diagram and the algorithm for image steganography using the concept of hybrid transform domain are as shown:

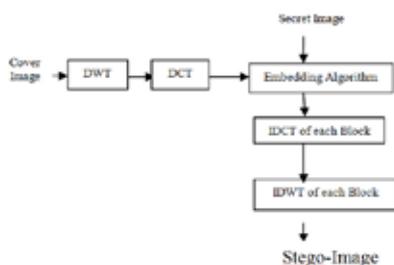


Fig. 2: Hybrid Transform Domain Technique for Hiding Secret Image in Cover Image

IV Embedding Methods

There are various ways of embedding the secret image in the hybrid domain cover image. Out of these, two techniques i.e. bit replacement and DCT + fusion are compared for imperceptibility. In the bit replacement method of embedding, a number of LSB's of the cover image are replaced by the MSB's of the secret image. In the second embedding algorithm method, secret image is first DCT transformed and then fused in the hybrid domain of the cover image.

V Results and Comparison

The results for the two techniques are as shown:



Figure 3: Hybrid Transform Domain Technique using Bit Replacement



Figure 4: Hybrid Transform Domain Technique using DCT+Fusion

For embedding, the cover image is taken as the cameraman image and the secret image is taken as rice image. The PSNR for the first technique i.e. bit replacement (figure 3) is 33.268 and using the second technique i.e. DCT+fusion (figure 4) is 64.110. This shows that the stego image using DCT+fusion technique is almost similar to the cover image and secret image is not easily perceptible in comparison to bit replacement technique. As hybrid transform domain technique is used, so it is very difficult for an intruder to extract the secret image. As a scope for future work, the hybrid transform domain technique can be used along with Huffman encoding of secret image.

REFERENCE

- [1] Johnson, Neil F, and Sushil Jajodia, "Exploring Steganography: Seeing the Unseen", IEEE Computer Journal, pp. 26-34, February 1998. | [2] Beenish Mehboob, and Rashid Aziz Faruqui, "A Steganography Implementation", IEEE International Symposium on Biometrics and Security Technologies (ISBAST 2008), Islamabad, pp. 1-5, 23-24 April 2008. | [3] Kuang Tsan Lin, "Digital Image Hiding in an Image using n-graylevel Encoding", The 1st International Conference on Information Science and Engineering (ICISE 2009), IEEE Computer Society, Washington, DC, USA, pp. 1720-1724, 2009. | [4] Giacomo Cancelli, Gwenael Doerr, Ingemar J. Cox, and Mauro Barni, "Detection of ± 1 LSB Steganography Based on The Amplitude of Histogram Local Extrema", 15th IEEE International Conference on Image Processing (ICIP 2008), San Diego, CA, USA, pp. 1288-1291, 12-15 October 2008. | [5] Adrian G. Bors, Ioannis Pitas, "Image Watermarking Using DCT Domain Constraints", International Conference on Image Processing, Lausanne, Switzerland, pp. 1-4, September 1996. | [6] Rakesh Dugad, Krishna Ratakonda, and Narendra Ahuja, "A New Wavelet-Based Scheme for Watermarking Images", International Conference on Image Processing, Chicago, USA, pp. 419-423, October 1998. | [7] Ahmed A. Abdelwahab, and Lobna A. Hassaan, "A Discrete Wavelet Transform based Technique for Image data Hiding", 25th National Radio Science Conference (NRSC 2008), Tanta University, Egypt, pp. 1-9, March 2008. | [8] Chin-Chen Chang, Chi-Lung Chiang, and Ju-Yuan Hsiao, "A DCT Domain System for Hiding Fractal Compressed Images", Proceedings of IEEE 19th Conference on Advanced Information Networking and Applications, Volume 2, pp. 83-86, March 2005. | [9] Khalid Negrat, Raoof Smko, and Abdelsalam Almarimi, "Variable Length Encoding in Multiple Frequency Domain Steganography", 2010 2nd IEEE International Conference on Software Technology and Engineering (ICSTE), pp. 305-309, 2010. | [10] Saied Amirgholipour Kasmani, Ahmadreza Naghsh-Nilchi, "A New Robust Digital Image Watermarking Technique Based on Joint DWT-DCT Transformation", Third 2008 IEEE International Conference on Convergence and Hybrid Information Technology, Iran, pp. 539-544, 2008. |