

Through the Experimental Analysis Effects of Pollutants Air & Reduce Environmental Contaminates, Smoke & Particular Matters



Environmental Science

KEYWORDS : Smoke, Particular Matters, Aromatic Hydrocarbons.

LALIT KUMAR KHARE

ME Research Scholar, Department of Mechanical Engineering, Truba Institute Of Engineering & Information Technology, Bhopal M.P.

Dr.Nilesh Diwakar

Head Of Department, Mechanical Engineering, Truba Institute Of Engineering & Information Technology, Bhopal M.P.

ABSTRACT

Today, air pollution is responsible for undesirable matter such as smoke, particular matters & aromatic hydrocarbons in air which causes harmful effect on Human health, agriculture and environment. Air pollution causes due to exhaust mostly by Automobiles, industries etc.

Air pollution is also responsible for global warming and the increases the climatic temperature at a rate of 0.13 ± 0.03 °C per decade. In urban heavy traffic, the toxicity of smoke, particular matters & aromatic hydrocarbons can be minimized but the technology is time consuming and it is not cost effective. So India is lagging behind as compared to other countries.

Pollutant gas absorbing duct system consists of which act as casing, suction fan, circulating pumps, different filters and absorber. The present our research restricts itself to minimization of smoke, particular matters & aromatic hydrocarbons. This system is cost effective and reduces the maximum possible percentage of pollutant gas.

INTRODUCTION

The pollution is the one of the greater issue in the world today. Now day by day the pollution problems are go on increasing in the world. The pollution due to the air is also global serious issue today in the world. There are various sources of the air pollution such as natural, manmade sources etc. These all the source causes the harmful effect on of our environment and all living organism, so there is need to control the pollution. Due to heavy industrialization in the world the air pollution problems are also becoming a serious problem. Harmful air pollutants are emitted in the atmosphere from the industries during the processes. So there is need to control the pollutants which are emitted in the atmosphere from the industries. There are want to some control methods to control the pollution of air from the industries.

The current topic “Through the Experimental Analysis Effects of Pollutants Air & Reduce Environmental Contaminates, Smoke & Particular Matters” is related with the control devices, which are used for the control of gaseous air pollutants from the industries. It also includes the given introduction and sources of gaseous pollutants & of techniques involved in the control of gaseous air pollutants such as absorption, adsorption closed collection and recovery system etc.

LITERATURE REVIEW

Hendy Thee [1] This work deals with, the important implications on the operating condition and the design of the absorber and a regenerator units for carbon absorbing systems employing unprompted and borate promote potassium carbonate solution. In this research paper, Potassium carbonates based solution, have the potential for absorbing CO₂ from emission sources and such as Power stations burning fossil fuels.

A. Bologna [2] This work deals with; the novel wet electrostatic precipitator is designed for effective control of different partials and fine aerosols from humid gases in the atmosphere. It is operate on the principle of a uni-polar particle charging in the corona discharge and the particle precipitation under the field of their own space charge. In this research paper, the new precipitator is characterized by high gas velocity in the ionizing stage.

Phirun Saiyasitpanicha [3] this work deals with, the laboratory-scale, single-stage electrostatic precipitator was designed built and operated in a wind tunnel. In this research paper show that, a wire radius in the case of the air velocity, is appears turbulence intensity and the applied voltage. To the diameter of the

discharge wires and the wire to plate spacing is set smaller, so that, the higher collection efficiency has been obtained.

S.M.S. Nagendra [4] this work deals with, the Line source emission modelling system, is an important tool in control and management of vehicular exhaust emissions in urban environment. This paper represents a review of Line source emission modelling is used to carry out dispersion studies of statistical, vehicular exhaust emissions, numerical, based on deterministic and artificial neural network techniques.

U. Corsmeiera[5] This work deals with, the quality of an emission of NO_x, smoke and particular matters etc. It is calculation model based on emission factors. It is measured on roller test stands and statistical Traffic data was evaluated using different source strengths and the emission factors are calculated from real world exhaust gas concentration.


Sharad Gokhale[6] This work deals with, the statistical distributional form fitting to the concentrations data; this is based upon several factors that is pollutant types, source types, emission patterns, averaging times and meteorological conditions. The Modeling distribution of air pollutant concentrations is that, identification of statistical models. This paper is basically study the statistical characteristics of dispersion of air pollutants in the atmosphere and the represented by successive random dilution process.

S.M. Shiva Nagendra[7] This work deals with the results demonstrate that, Neural network models are able to the explain a effects of traffic wake on the carbon monoxide dispersion in the near field regions of a roadway. These works is provided theoretical estimates of air pollution concentrations, as well as temporal, spatial variations for present and future conditions.

METHODOLOGY

In this system we join the petrol and diesel engine exhaust, one valve is used for maintain the exhaust on petrol engine. The mixing of diesel engine and petrol engine pass through our device. In our device closed pack device, it takes different filters and one rotating fan. The mixing of exhaust (petrol and diesel engine) is suck the pollutant air by a fan. The pollutant air first pass through the dust filter, in the dust filter are absorbed big and solid partials is present in the engine exhaust. a dust filter is made are simple cotton. Then the engine exhaust are pass through the coal plate, the coal plate are absorbed moisture is present in exhaust and clean the engine exhaust. Then exhaust

is passing through the simple normal water plate. Normal water plate are fitted in our device, it is made a cushion, in the top of the water plate put a small pipe and set taper in the device, now top end of the plate where fitting a small pipe pass through the water, the cushion fill in the water, then pass through the exhaust in this plate so some partials of smoke and particular matters are stay in the plate, then exhaust pass through the Soda lime plate. This plate is absorb smoke and small quantity of CO₂. then the exhaust pass through the a silica gal plate, in this plate are absorbed moisture and dust partials, then fresh air are go to the our device exhaust. The intensity of fresh air are tested by pollution control board (PCB) by smoke analyzers and dust filter device, attached the test report of next chapter.

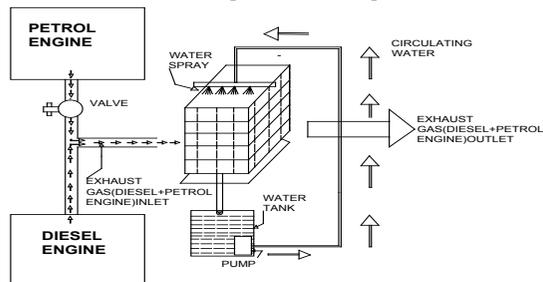

Layout Diagram of Experimental Analysis

CASING:- It is a very significant part of the system in which slots are plotted to fasten dust filter and absorbers in the interior of the casing. It is prepared of frame of mild steel pipe on which mild steel plates are fixed. One end of the casing is called inlet section and other end is called outlet section.

SUCTION FAN- Suction fan is used to suck the pollute gases and air combination from the surrounding and stress create in the interior the casing. It is fixed at the inlet section of the casing



DUST FILTER- Dust filter is a device which is composed of cotton materials and used to separate fine solid dust particles, pollen and bacteria from the air. Air filter usually placed in front of the suction fan. Dust filter is made by cotton cloth which is built-in on the wooden frame, some dimension is shown below which is following as; Height of frame (outer) = 58 cm ,Height of frame (inner) = 48cm



ACTIVATED CHARCOAL- Activated carbon, also widely known as activated charcoal or activated coal is a form of carbon which

has been processed to make it extremely

porous and thus to have a very large surface area available for adsorption or chemical reactions.



WATER ABSORBING SYSTEM WITH KOH -Caustic potash is an odorless white & deliquescent solid that can be absorbed the hot gases and smokes etc. Potassium hydroxide (KOH) is a good absorbent but it melts in the presence of oxygen and moisture, so it cannot be formed in plate form.



TECHNICAL SPECIFICATION OF THE PUMP: Power = 18W, Height = 1.8 meters

Output = 1100 L/ H, Volt =165/240 V

WATER ABSORBING SYSTEM WITH SODA LIME- Soda lime is contains 94% Calcium hydroxide and 5% sodium hydroxide with 1% potassium hydroxide. It absorbs carbon dioxide in the presence of water vapor or moisture. The granules have a porous structure which allows permeability of the expiratory gases into the interior where carbon di oxide is chemically converted and removed.



SILICA GEL- Silica gel is a porous, granular, vitreous form of silicon dioxide made synthetically from silicate. A Silica gel is tough and hard, it is more solid than common household gels like gelatin and agar. It is a naturally occurring mineral that, is purified and processed into either granular or beaded form. As a desiccant, it has an average pore size of 2.4 nanometers and has a strong affinity for water molecules.



RESEARCH FINDINGS AND OUTCOMES

(1) **Smoke Density Test Graph**- the Figure 1 shows smoke density test graph. The test graph is plotted between percentage reductions in Smoke density & Exhaust flow rate. A combined exhaust from diesel and petrol engines are passed through duct of our device, density of smoke at the inlet of device was found 17.4 HSU by smoke density analyzer. The density of smoke at outlet was found decreasing gradually at different velocities which is represented by the following graph.

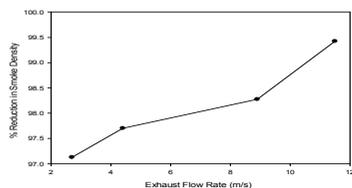


Figure 1 Smoke Density Test Graph

(2) **RSPM Test Graph** - The Figure 2 shows RSPM Test Graph. The test graph is plotted between percentage reductions in RSPM & Exhaust flow rate. A combined exhaust from diesel and petrol engines are passed through duct of our device, RSPM of exhaust at the inlet of device was found 13486.66µg/m³ RSPM analyzer. The RSPM Found at outlet is decreasing gradually at different velocities but higher velocity it is gradually increased, which is represented by the following graph.

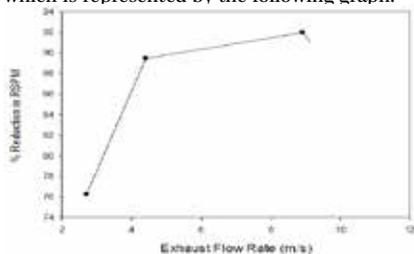


Figure 2 RSPM Test Graph

BAR CHART

(1) **Smoke Density bar chart:** The Figure 3 shows Smoke Density bar chart. The bar chart is plotted between Smoke density & smoke speed. This data is obtained has decreasing smoke density in the air. The apparent darkness of a smoke depends upon the concentration of the particulate matter in the effluent, the size of the particulate, the depth of the smoke column being viewed, and natural lighting conditions such as the direction of the sun relative to the observer while the accuracy of the chart.

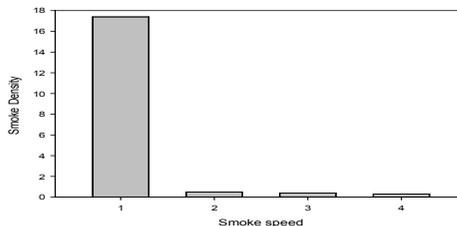


Figure 3 Smoke Density bar chart

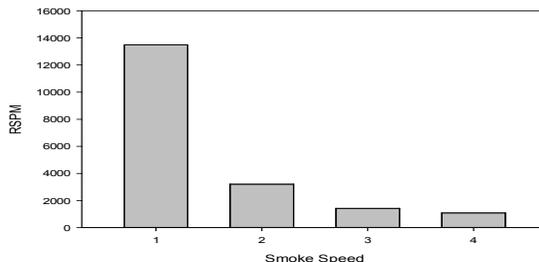


Figure 4 RSPM Bar Chart

CONCLUSIONS

- The “Through the Experimental Analysis Effects of Pollutants Air & Reduce Environmental Contaminates, Smoke & Particular Matters” is very useful and advantageous for our environment.
- Its remove dust particles and various harmful smoke and Particular matters etc. For those places where they are placed.
- System maintenance cost is very low.
- Working principle is not very complicated.
- They are mostly useful for industrial and trifocal areas.

REFERENCE

[1] “Carbon dioxide absorption into unprompted and borate-catalyzed potassium carbonate solutions”- Hedy Thee, Kathryn H. Smith, Gabriel da Silva, Sandra E. Kentish, Geoffrey W. Stevens, Cooperative Research Centre for Greenhouse Gas Technologies (CO2CRC), Department of Chemical and Biomolecular Engineering, The University of Melbourne, Victoria 3010, Australia, Chemical Engineering Journal 181- 182 (2012) 694- 701 | [2] “Novel wet electrostatic precipitator for collection of fine aerosol”- A. Bologna, H.R. Paur, H. Seifert, Th. Wa’scher, K. Woletz, Forschungszentrum Karlsruhe, Institut für Technische Chemie, Hermann-von-Helmholtz-Platz 1, D-76344 D-69123 Heidelberg, Germany, Journal of Electrostatics 67 (2009) 150-153 | [3] “Removal of diesel particulate matter (DPM) in a tubular wet electrostatic precipitator”- Phirun Saiyaisitanicha, Tim C. Keener, Soon-Jai Khangb, Mingming Lua, accepted 29 January 2007 Available online 28 February 2007 Journal of Electrostatics 65 (2007) 618-624 | [4] “Line source emission modelling”- S.M.S. Nagendra, Mukesh Khare, Department of Civil Engineering, Indian Institute of Technology, Hauz Khas, New Delhi 110016, India Received 6 September 2001; accepted 22 January 2002 Atmospheric Environment 36 (2002) 2083-2098 | [5] “Comparison of measured and model-calculated real-world traffic emissions”- U. Corsmeiera, D. Imhof, M. Kohler, J. Khlweinc, R. Kurtenbachd, M. Petread, E. Rosenbohmf, B. Vogela, U. Vogtg Institut of Meteorologie und Klimaforschung (IMK), Forschungszentrum Karlsruhe/Universitt Karlsruhe, Postfach 3640, 76021 Karlsruhe, Germany Paul Scherrer Institut (PSI), Labor for Atmosph renchemie, 5232 Villigen, Switzerland Institut für Energiewirtschaft und Rationelle Energieanwendung (IER), Universita’t Stuttgart, Germany, Received 6 January 2005; received in revised form 12 June 2005; accepted 27 June 2005, Atmospheric Environment 39 (2005) 5760-5775 | [6] “Statistical behavior of carbon monoxide from vehicular exhausts in urban environments”- Sharad Gokhale, Mukesh Khare, Department of Civil Engineering, Indian Institute of Technology Guwahati, North Guwahati, Guwahati, Assam 781 039, India Department of Civil Engineering, Indian Institute of Technology Delhi, Hauz Khas, New Delhi 110 016, India Received 13 September 2004; received in revised form 4 August 2005; accepted 12 February 2006 Available online 2 May 2006, Environmental Modelling & Software 22 (2007) 526-535 | [7] “Artificial neural network based line source models for vehicular exhaust emission predictions of an urban roadway”- S.M. Shiva Nagendra, Mukesh Khare Department of Civil Engineering, Indian Institute of Technology Delhi, Hauz Khas, New Delhi 110 016, India, Transportation Research Part D 9 (2004) 199-208. |